

3W HIGH POWER RGB LED




ATTENTION: LED IS AN
ELECTROSTATIC SENSITIVE DEVICE.
HANDLE WITH PRECAUTION.

■ FEATURES

- Guaranteed minimum flux up to 20 for Blue, 70 for Green, 40 for Red at 350mA
- Maximum drive current up to 500mA.
- Max junction temperature: 120 °C
- No UV light
- Fast lit up response (less than 100ns)
- Patented thermal management process, industries' lowest thermal resistance from Chip base to STAR heat sink.
- Electrically neutral thermal path
- Long lifetime of 50,000 hours.
- RoHS-compliant
- Compatible with most commonly available collimators in the market.

■ TYPICAL APPLICATIONS

- Stage lighting
- Exterior and interior decorative lightings for shops, restaurants, hotels, discos, pubs, etc
- Signage lighting.
- Landscape lightings like parks, bridges, buildings.
- Edge-lit signs.

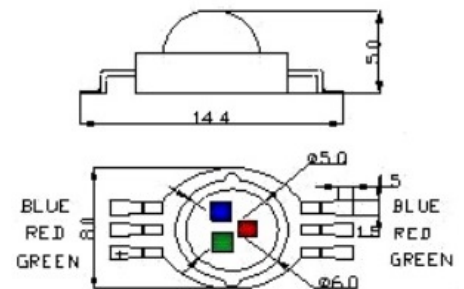

3W HIGH POWER RGB LED

Flux Characteristics ($T_j = 25^{\circ}\text{C}$; $I_F = 350\text{mA}$)

Color	Wave Length (nm)	Luminous Flux(lm)	Ordering Code
Red	620~630	30~40	RGB3060-15S
Green	520~530	60~70	
Blue	460~470	15~25	

Note: maintains a tolerance of +/- 4% on flux measurements.


Characteristics

Characteristics	Unit	Minimum	Typical	Maximum
Viewing Angle	degrees	115	120	125
DC forward current	mA			370
DC pulse current (@ 1kHz, 10% duty cycle)	mA			500
Reverse voltage	V			5
Reverse Leakage current @5V	uA			10
Forward Voltage @350mA – Green, Blue	V	3.0	3.4	3.6
Forward Voltage @350mA – Red	V	2.0	2.4	2.6
LED Junction Temperature	°C			120
Suggested operating case temperature	°C			80
Storage temperature	°C	-40		100
Electrostatic Discharge Threshold (HBM)	V			2000

Note: maintains a tolerance of +/- 0.1V on Forward Voltage measurements.

3W HIGH POWER RGB LED

Electrical Characteristics ($T_i = 25\text{ }^\circ\text{C}$)

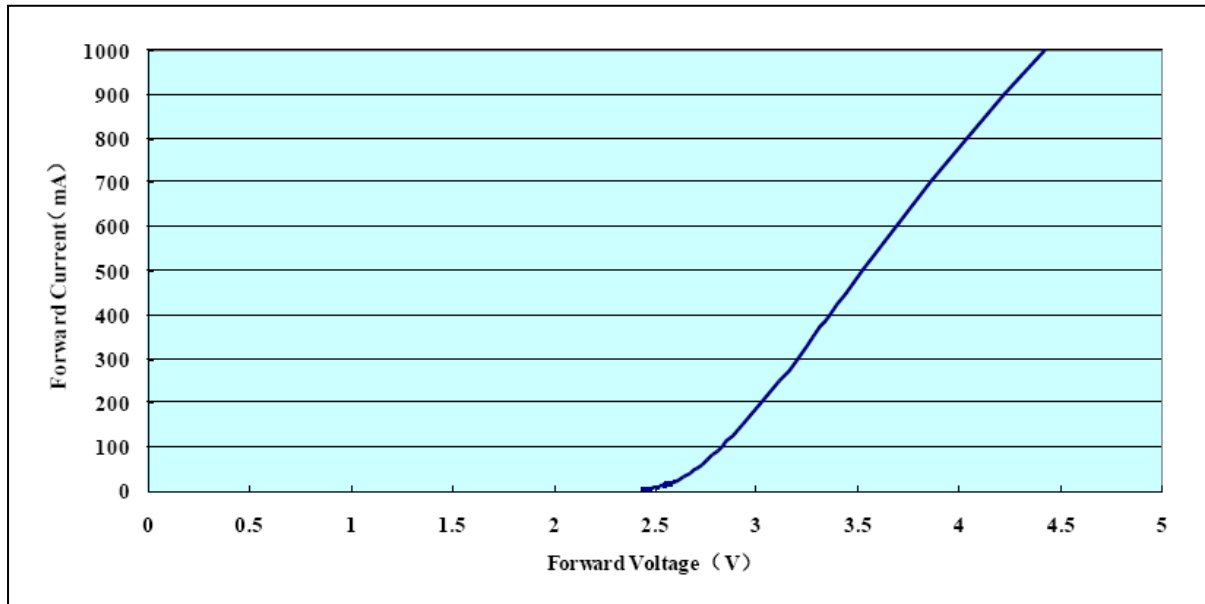

Relative Flux vs Current ($T_i = 25\text{ }^\circ\text{C}$)

