

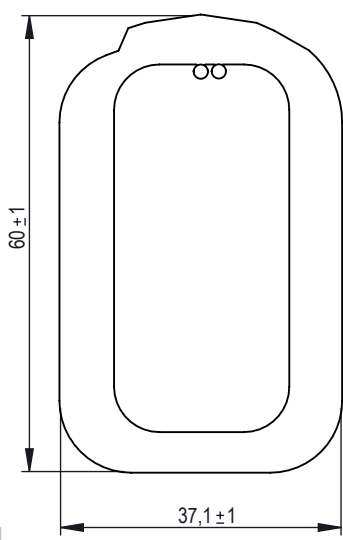
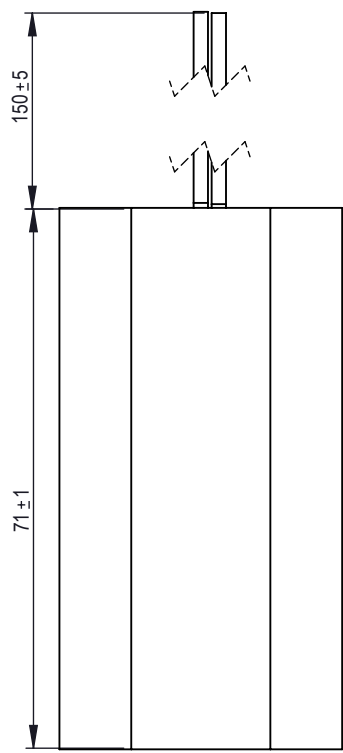


Caution: The following electrical parameters relating to the working of battery pack at 25 °C.

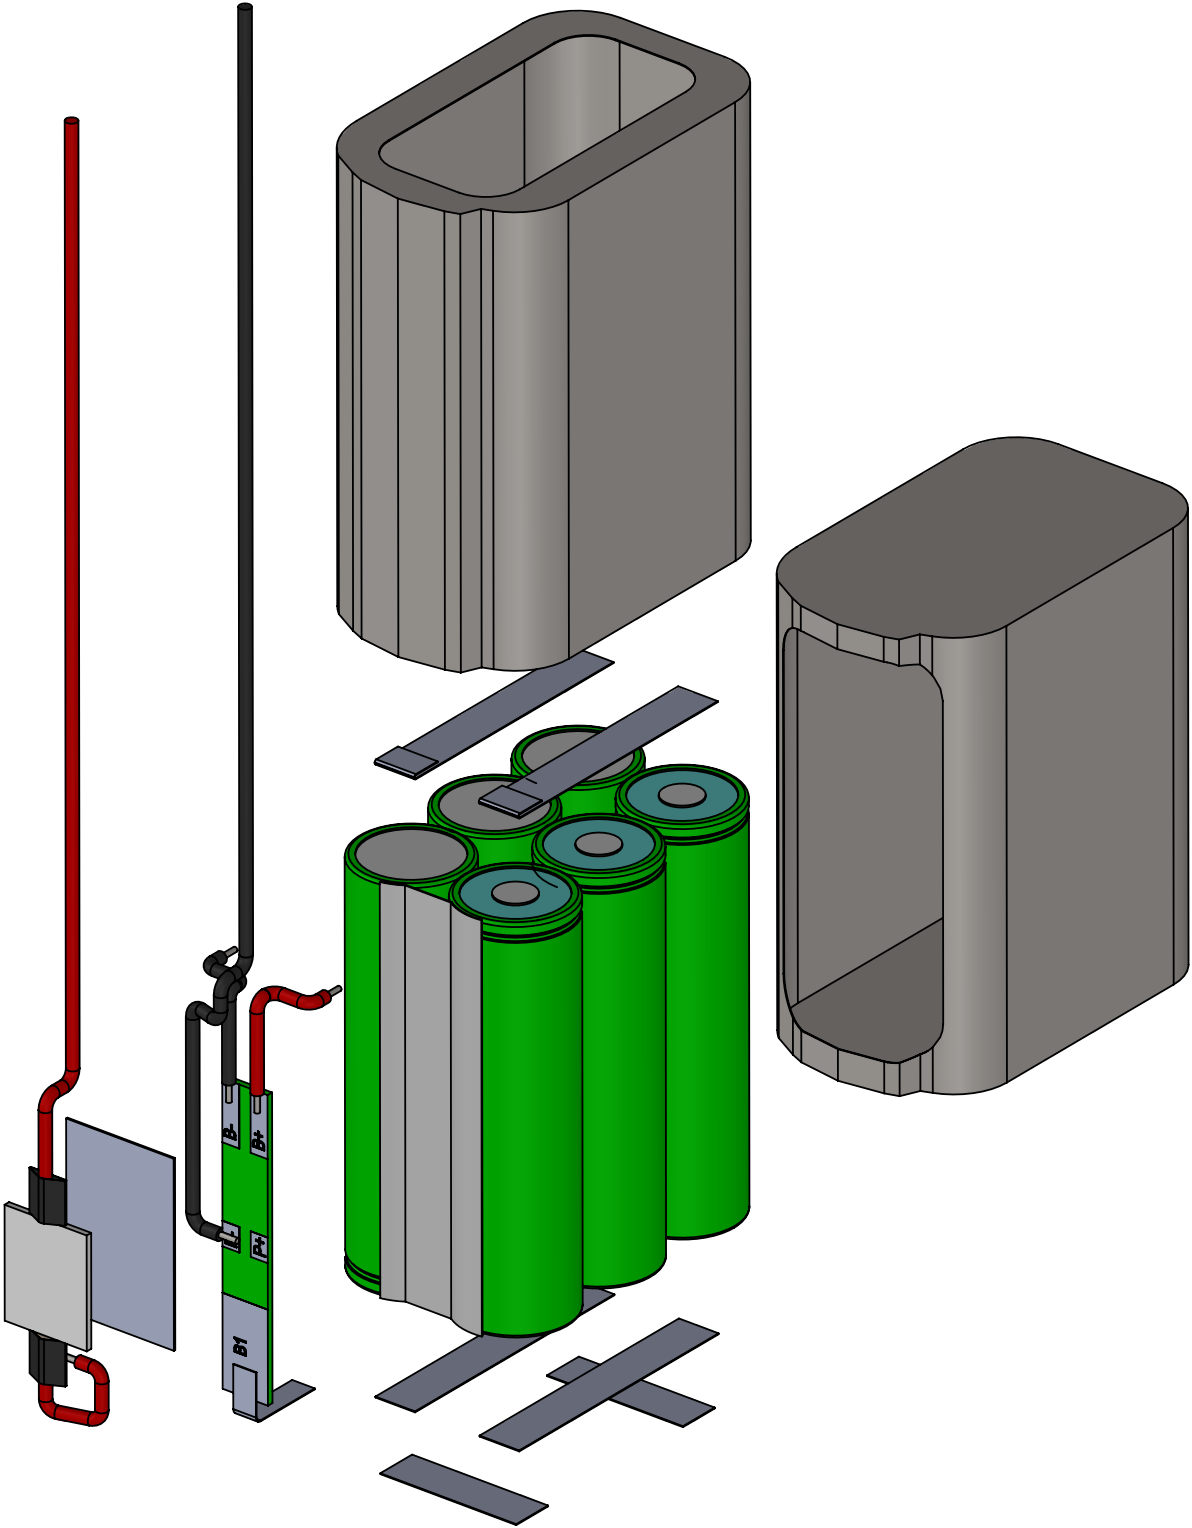

| Specifications                                 |             | 2S3P ICR18650-26H     |
|------------------------------------------------|-------------|-----------------------|
| Nominal voltage [V]                            |             | 7,2                   |
| Typical capacity [mAh]                         |             | 7800                  |
| Charging method                                |             | CC/CV                 |
| Charging voltage [V]                           |             | 8,4                   |
| Size [mm]                                      |             | According to the draw |
| Weight [g]                                     |             | 330                   |
| Typical charge [mA]                            |             | 3900                  |
| Maximum continuous discharge current/Max. [mA] |             | 6000                  |
| Discharge cut-off voltage:                     |             | 5                     |
| Charge temperature                             | Typical     | 0°C do 45°C           |
|                                                | Rapid       | 10°C do 45°C          |
| Discharge temperature                          | Continuous  | 20°C do 60°C          |
| Storage temperature                            | Recommended | 20°C do 35°C          |

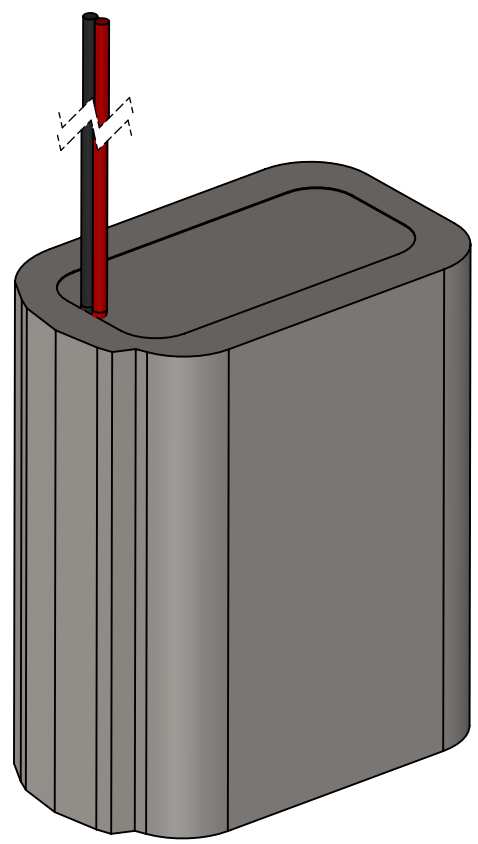

|            |            |                   |     |            |
|------------|------------|-------------------|-----|------------|
|            | 1:1        |                   | 1/1 | 1          |
|            |            |                   |     | B          |
|            |            |                   |     | ⚠ ⊕        |
| 2015-08-10 | 2014-01-20 | Battery pack 2S3P |     | 1132.00.00 |