

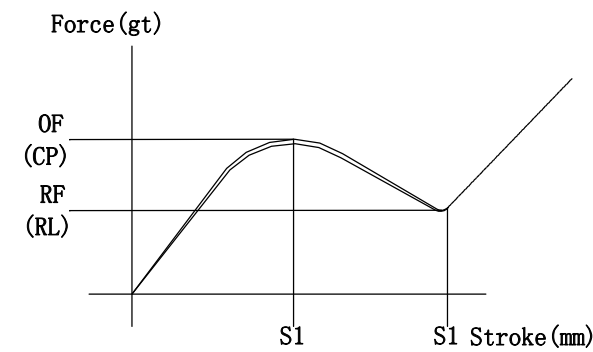
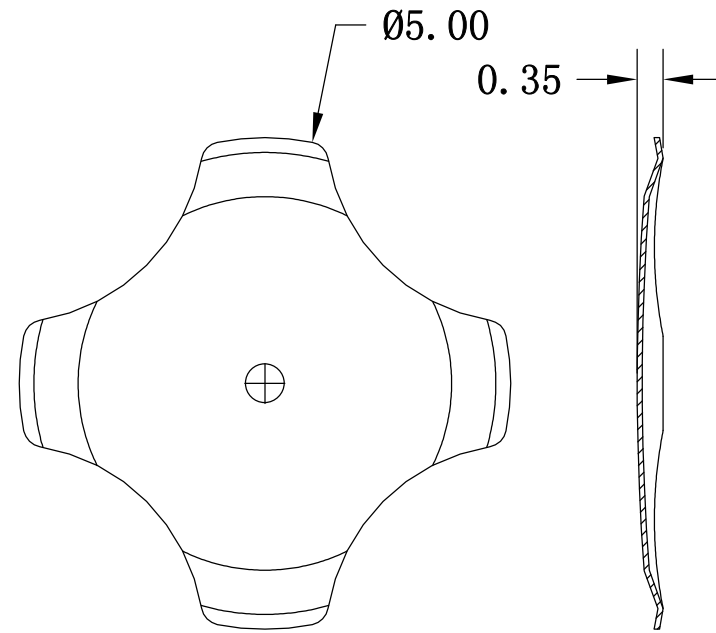


5mm



Force Characteristics



OF:Operating Force(gt)
 CP:Compression Peak Point
 RF:Return Force(gt)
 RL:Release Low Point
 S:Stroke (mm)
 SR:Snap Ratio
 $SR = [(OF - RF) / OF \times 100] \%$



Measurement Method


Product model	Crisscross
Diameter 1 (mm)	$\varnothing 5^{+0.00}_{-0.07}$
Diameter 2 (mm)	$\varnothing 0.4 \pm 0.05$
Force (gt)	200 ± 25
Stroke (mm)	0.24 ± 0.05
Height of Dome (mm)	0.35 ± 0.05
Height of Dimple (mm)	
Snap Ratio	$45 \pm 10\%$
Life Test	A half a million driver
Contact Resistance	<1 ohm
Storage Temp	$-55^{\circ} C \sim +125^{\circ} C$
Operating Temp	$-40^{\circ} C \sim +100^{\circ} C$
Humidity Range	10%RH~95%RH
Material	Stainless Steel 301 (0.07mm)
Plating	Bare wood

6.0

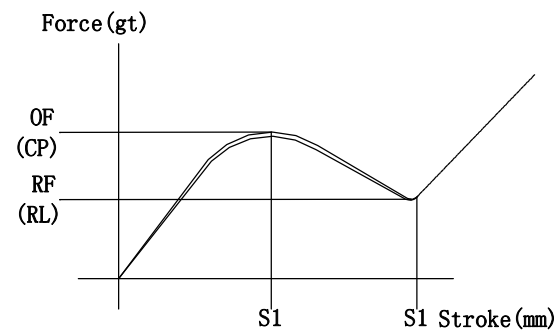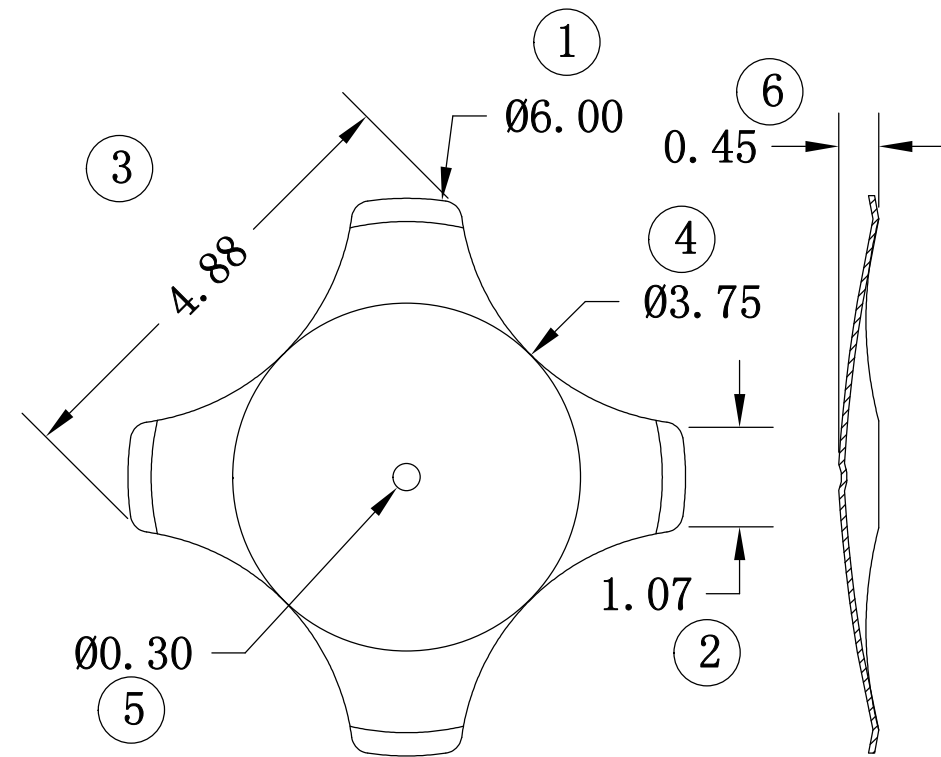

Force Characteristics



OF:Operating Force (gt)
 CP:Compression Peak Point
 RF:Return Force(gt)
 RL:Release Low Point
 S:Stroke (mm)
 SR:Snap Ratio
 $SR = [(OF - RF) / OF \times 100] \%$

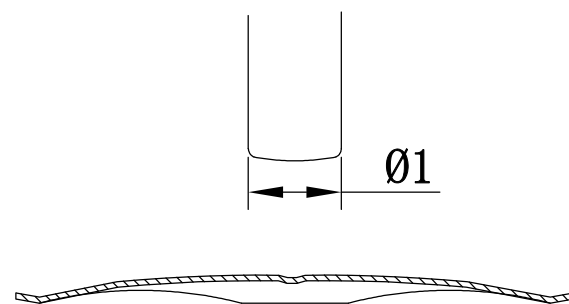

Measurement Method


Product model	6MM-
1	6MM $^{+0.00}_{-0.07}$
2	1.07MM ± 0.05
3	4.88MM ± 0.05
4	3.75MM ± 0.1
5	0.3MM ± 0.05
6	0.45MM ± 0.05
Stroke (mm)	0.35MM ± 0.05
Force (gt)	250 \pm 30
Snap Ratio	55 \pm 15%
Contact Resistance	<1 ohm
Storage Temp	-55° C ~ +125° C
Operating Temp	-40° C ~ +100° C
Humidity Range	10%RH ~ 95%RH
Material	Stainless Steel 301 (0.07mm)
Plating	Bare wood

7mm

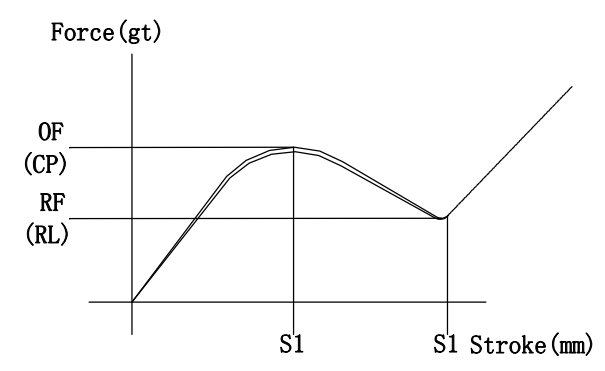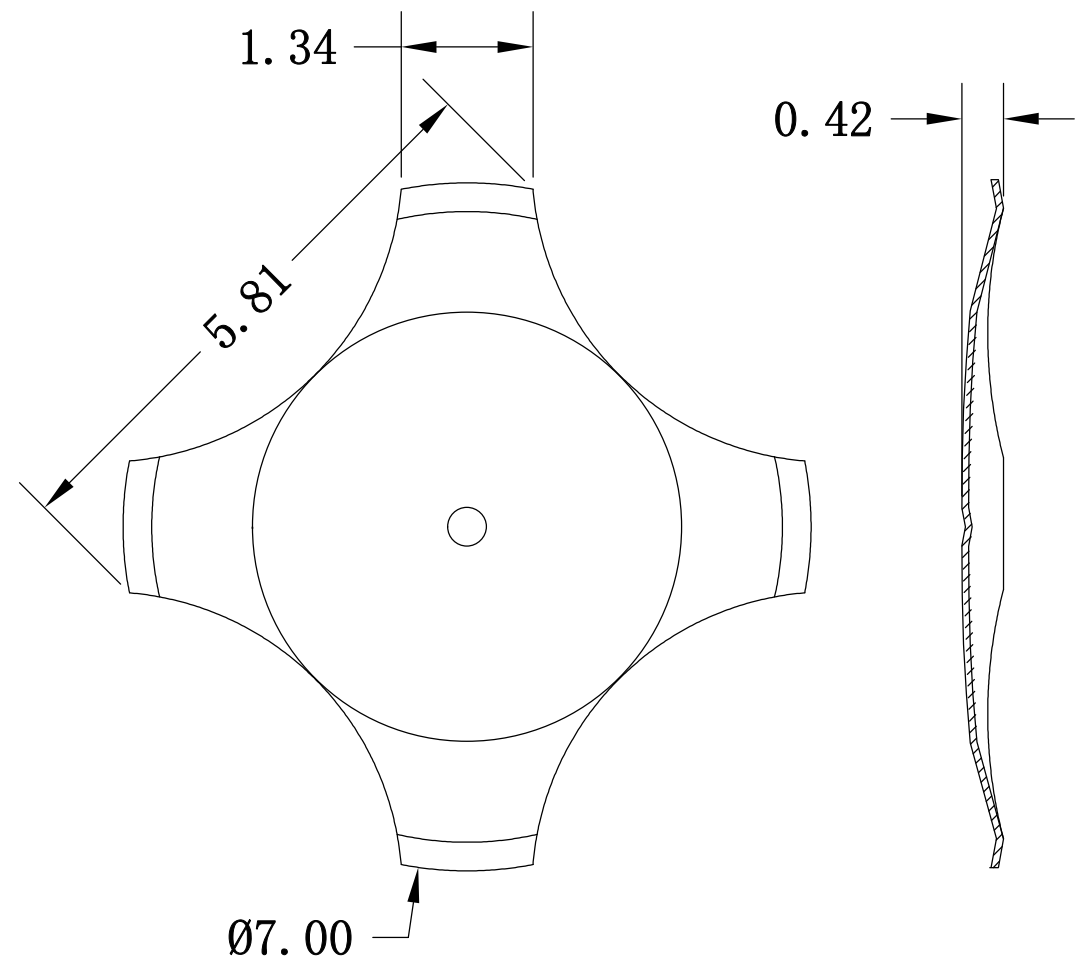

Force Characteristics



OF:Operating Force(gt)
 CP:Compression Peak Point
 RF:Return Force(gt)
 RL:Release Low Point
 S:Stroke (mm)
 SR:Snap Ratio
 $SR = [(OF - RF) / OF \times 100] \%$

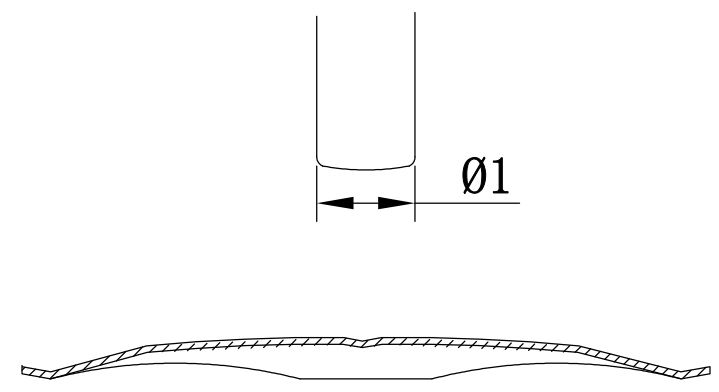

Measurement Method


Product model	Crisscross
Diameter 1 (mm)	Dia7 ^{+0.00} / _{-0.07}
Diameter 2 (mm)	
Force(gt)	250+/-30
Stroke (mm)	
Height of Dome (mm)	0.42±0.03
Height of Dimple (mm)	
Snap Ratio	50±10%
Life Test	A half a million driver
Contact Resistance	<1 ohm
Storage Temp	-55° C~+125° C
Operating Temp	-40° C~+100° C
Humidity Range	10%RH~95%RH
Material	Stainless Steel 301 (0.08mm)
Plating	Bare wood

8.4mm

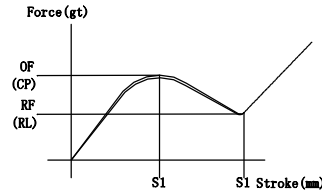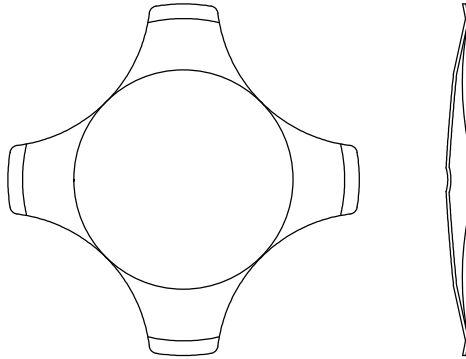

Force Characteristics




OF:Operating Force(gt)
 CP:Compression Peak Point
 RF:Return Force(gt)
 RL:Release Low Point
 S:Stroke (mm)
 SR:Snap Ratio
 $SR = [(OF - RF) / OF \times 100]\%$

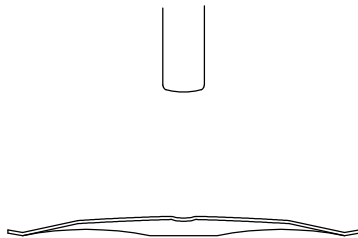

Measurement Method



Product model	Crisscross
Diameter 1 (mm)	Ø8.4±0.05
Diameter 2 (mm)	Ø0.6±0.05
Force (gt)	250+/-30
Stroke (mm)	0.42±0.05
Height of Dome (mm)	0.55±0.05
Height of Dimple (mm)	0.12±0.02
Snap Ratio	60±10%
Life Test	A half a million driver
Contact Resistance	<1 ohm
Storage Temp	-55° C~+125° C
Operating Temp	-40° C~+100° C
Humidity Range	10%RH~95%RH
Material	Stainless Steel 301 (0.08mm)
Plating	Bare wood

10mm

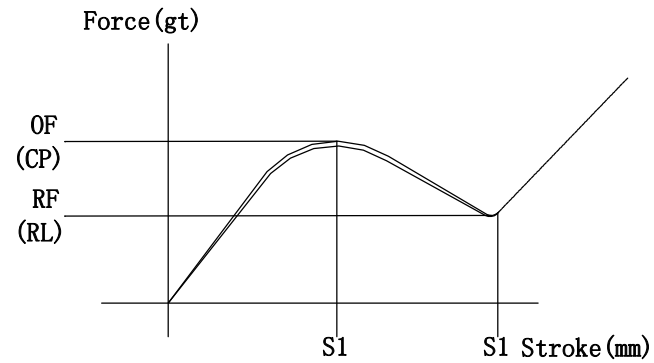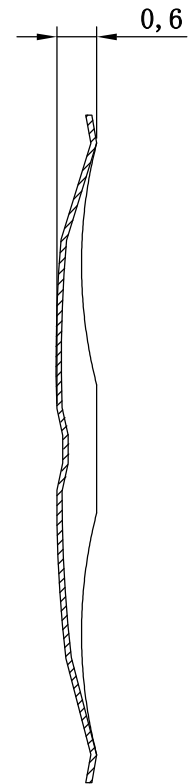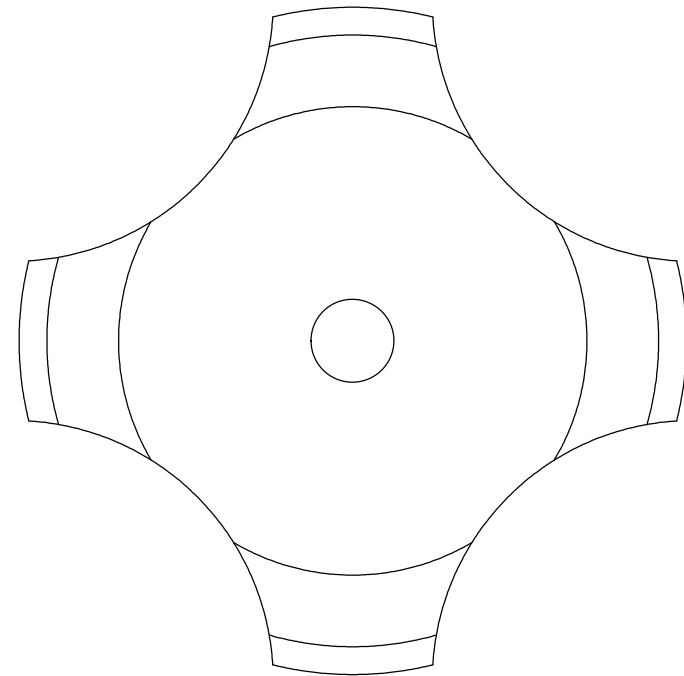

Force Characteristics

OF:Operating Force(gt)
 CP:Compression Peak Point
 RF:Return Force(gt)
 RL:Release Low Point
 S:Stroke(mm)
 SR:Snap Ratio
 $SR = [(OF - RF) / OF \times 100] \%$

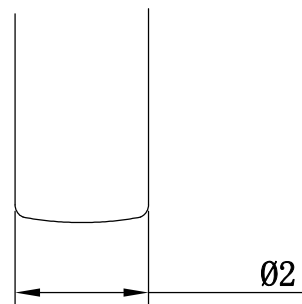

Measurement Method

Product model	Crisscross
Diameter 1 (mm)	$\varnothing 10^{+0.00}_{-0.07}$
Diameter 2 (mm)	$\varnothing 1.1 \pm 0.05$
Force (gt)	250 \pm 30
Stroke (mm)	
Height of Dome (mm)	0.60 ± 0.05
Height of Dimple (mm)	
Snap Ratio	$55 \pm 10\%$
Life Test	A half a million driver
Contact Resistance	<1 ohm
Storage Temp	-55° C ~ +125° C
Operating Temp	-40° C ~ +100° C
Humidity Range	10%RH ~ 95%RH
Material	Stainless Steel 301 (0.10mm)