
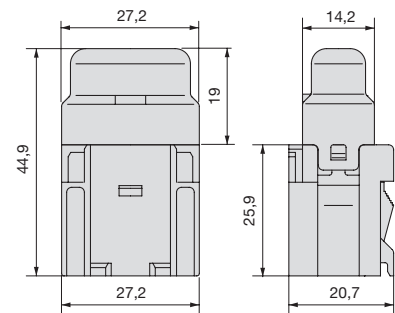


SPLASH PROOF UNIVAL® HOLDER

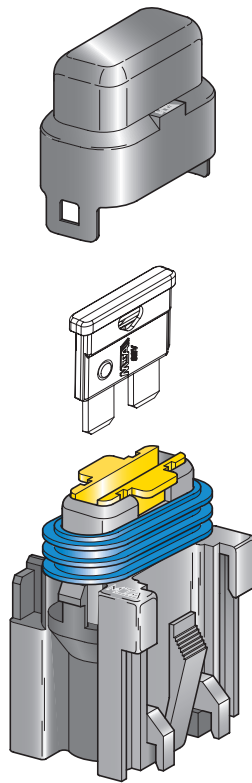

1

IMG.	DESCRIPTION	WAY	MATERIAL	COLOUR	P/N BOX	M.O.Q.	P/N BOX	M.O.Q.	P/N BULK	M.O.Q.
1	S.P. HOLDER+ COVER	1	PA66	Black					0301301	1200
	+ SECONDARYLOCK 1 AMP		PBT GF20	Black						
	+ SECONDARYLOCK 5 AMP		PBT GF20	Beige			0302305	100	0301305	1200
	+ SECONDARYLOCK 7,5 A		PBT GF20	Brown					0301307	1200
	+ SECONDARYLOCK 10 AMP		PBT GF20	Red			0302310	100	0301310	1200
	+ SECONDARYLOCK 15 AMP		PBT GF20	Blue			0302315	100	0301315	1200
	+ SECONDARYLOCK 20 AMP		PBT GF20	Yellow	0101320	50	0302320	100	0301320	1200
	+ SECONDARYLOCK 25 AMP		PBT GF20	Natural			0302325	100	0301325	1200
	+ SECONDARYLOCK 30 AMP		PBT GF20	Green			0302330	100	0301330	1200
	KIT WITH TERMINALS GASKET AND FIXING PLATE				3050153	1				

CONNECTIONS AND FIXINGS



0300949



0300851



0300856



0300392



0300440



0300430



0300697






0300698



UNI F630

UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

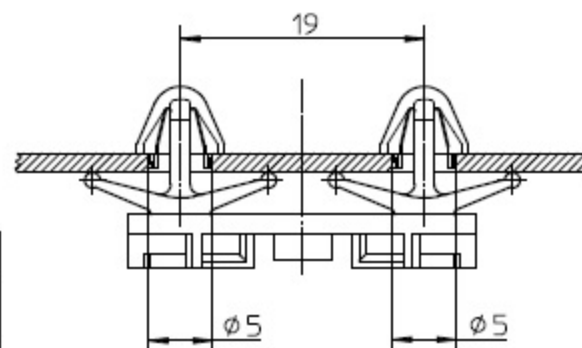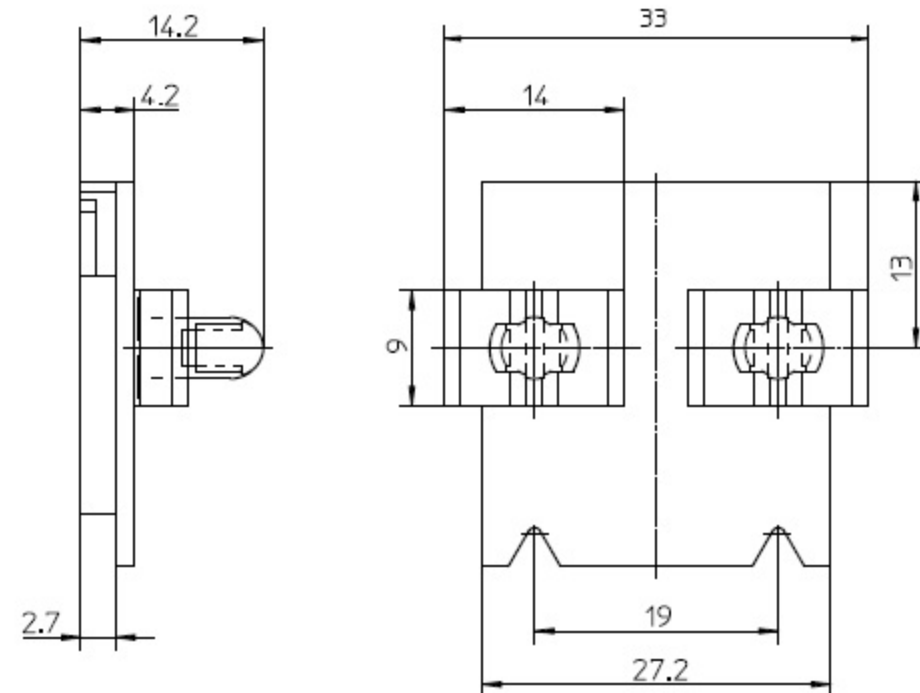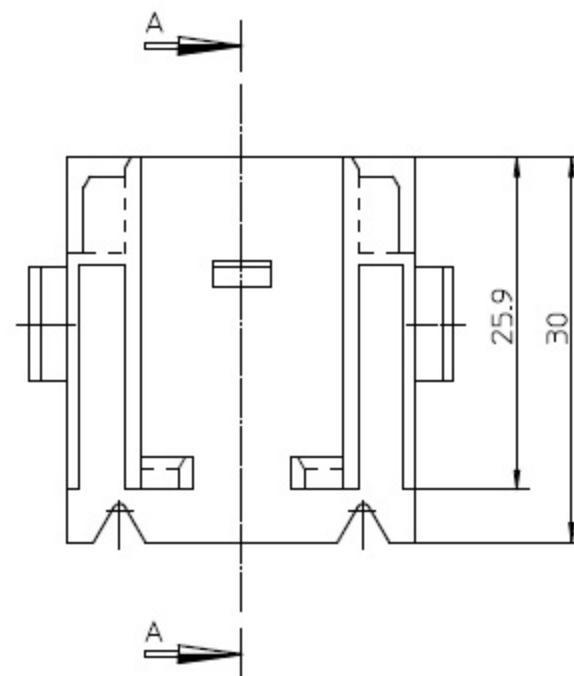


Ø HOLE (mm)	PLATE THICKNESS (mm)	INSERTION LOAD (N)	EXTRACTION LOAD (N)
5	1.2	95±15%	150±15%
	2	155±15%	

NOTE:
THE USE FOR PLATE WITH THICKNESS
HIGHER THAN 2mm IS NOT RECOMMENDED

OPERATING FEATURES

FEATURE	UNIT	VALUE
T.min - T.max	°C	-40 / +120
Flamability	FMVSS302 UL 94	slow combust. veloc. HB







FIXING SYSTEM ON PLATE Thickness min 1.2 - max 2.5



Scale 2:1

		MTA P/N		0300392		Denom. FIXING PLATE PRESSURE					
		Draw No.		B0-149.L02A		Used for FUSEHOLDERS					
Rel Level		APPROVED		Draw for		CLIENT		Relevant Standard FUSE HOLDERS			
Date		Name		Scale	Weight(g)	Lin.Tol.±	Ang.Tol.±	Material PA 66		Thick.	Width
Draft.	17/01/1991	L.BASSI		2:1	23	0.5	2	Coating			
Chk.	19/10/2011	E.UGGERI									
POApp.	19/10/2011	M.ROSSI			Dimensions In (mm)	Sheet 1/1	Color BLACK				
App.	18/10/2011	M.CORBANI									
4		INSERTION AND EXTRACTION TABLE ADDED									
No.	Reason for Revision						Date	18/10/2011		Name	E.UGGERI

All proprietary rights reserved by MTA S.p.A. - This drawing shall not be reproduced, or in any way utilized for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringement will be legally pursued.

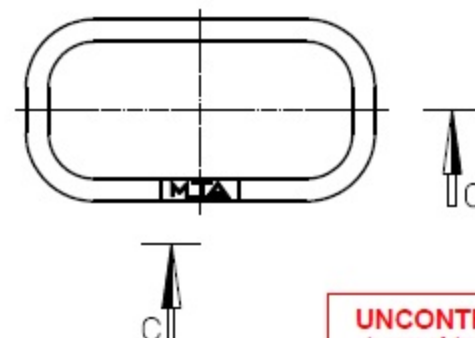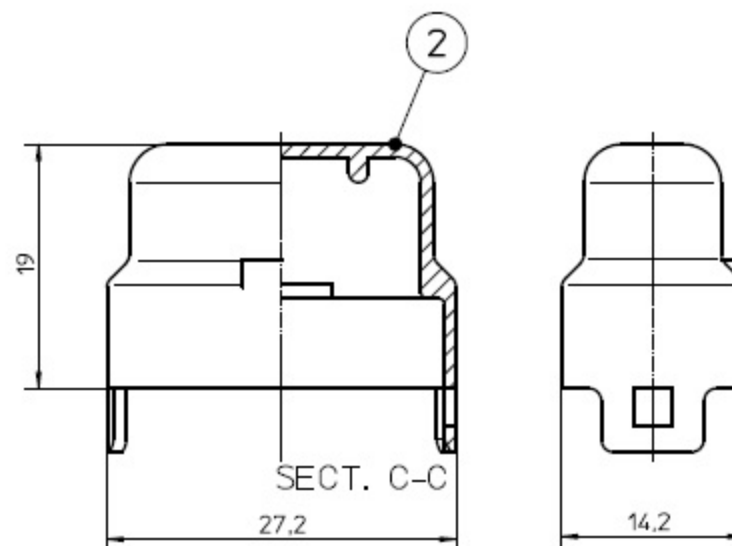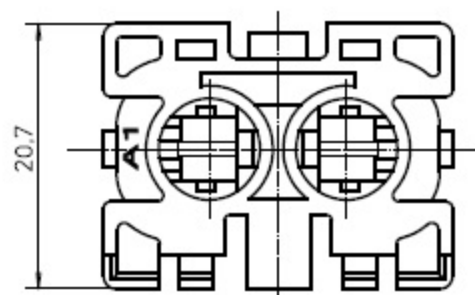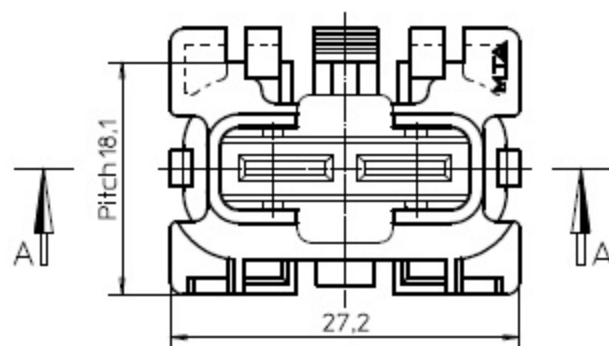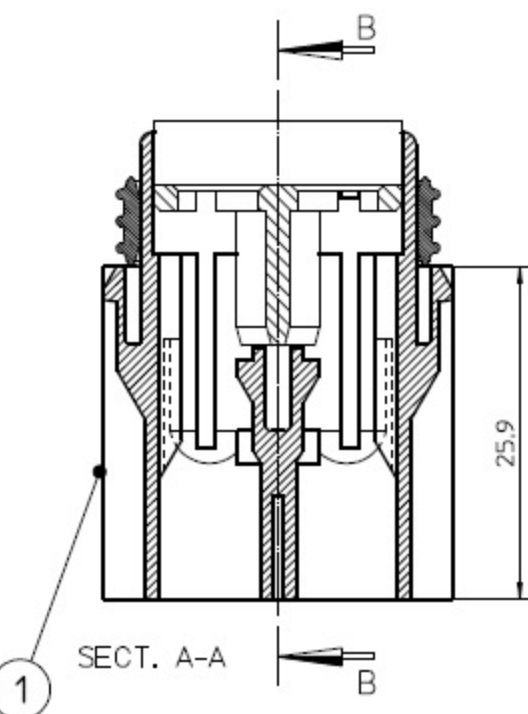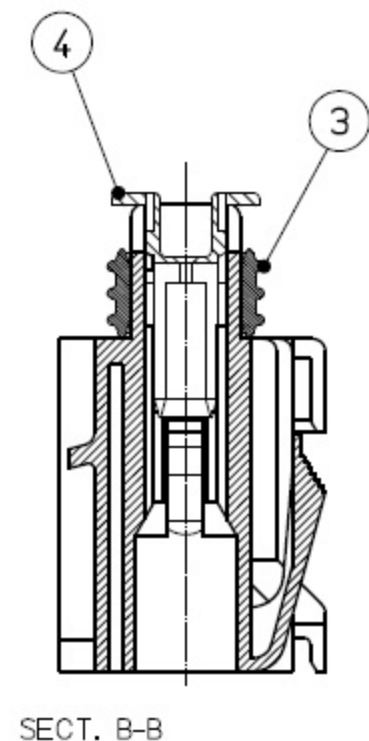

OPERATIVE STATEMENTS



Max Voltage	32V
I Continuous	21A
Temperature Range	-40°C / +120°C
Impermeability Ratio	IP33

0301301	BLACK	1A
0301305	BEIGE	5A
0301307	BROWN	7.5A
0301310	RED	10A
0301315	BLUE	15A
0301320	YELLOW	20A
0301325	WHITE	25A
0301330	GREEN	30A
MTA-PN	SEC. LOCK COLOR	FUSE


UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

4	1	SECONDARY LOCK	PBT GF20 HB
3	1	GASKET	SILICON - BLUE COLOR
2	1	COVER	PA 66 HB - BLACK COLOR
1	1	HOUSING	PA 66 HB - BLACK COLOR
Pos.	Qty	DENOMINATION	MATERIAL
		MTA auto electric systems	MTA P/N 0301305 Draw No. B0-001.016A
		Rel. Level APPROVED	Denom. FUSE HOLDER SPLASH PROOF
		Draw for CLIENT	Used for UNIVAL
		Date Name	Family FUSE HOLDERS MULTIWAY
		Scale Weight(g) Lth.Tol. Ang.Tol.	Material SEE TABLE
		Thick. Width	Coating
		Color	SEE TABLE
9 OPERATING FEATURES UPDATED			
No.	Reason for Revision		Date 25/11/2004 Name A. CAPELLI

REV	DESCRIPTION	NAME	DATE
13	TERMINAL CONFIGURATION MODIFIED	D.VACCHELLI	19/04/04
14	MARKING MATERIAL UPDATED	S.BEDUSCHI	30/08/16

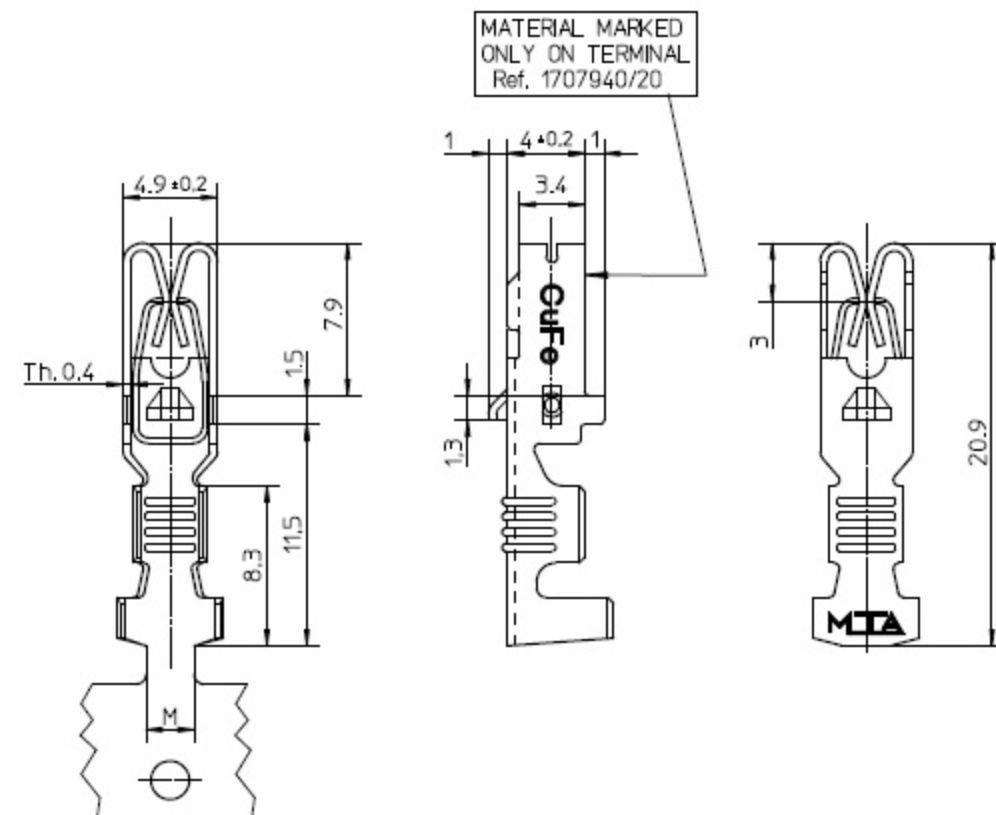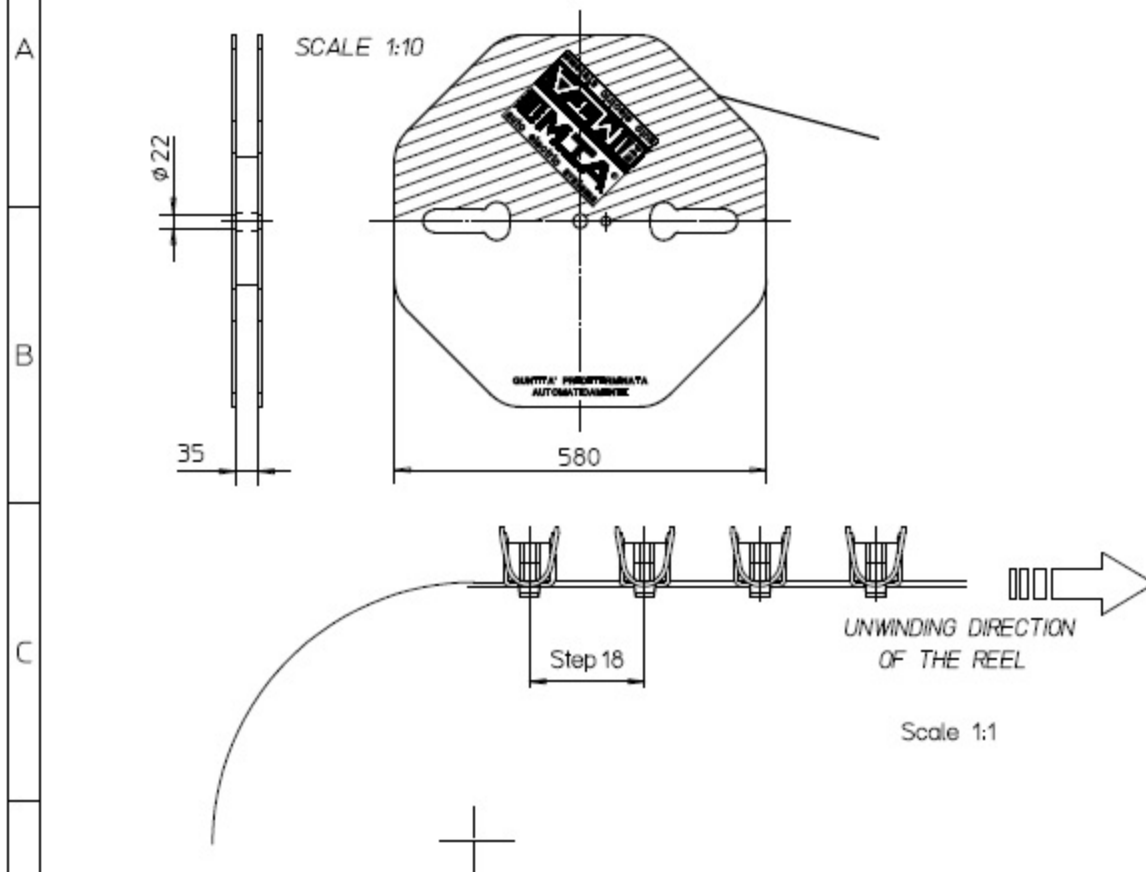

CRIMP STATEMENTS

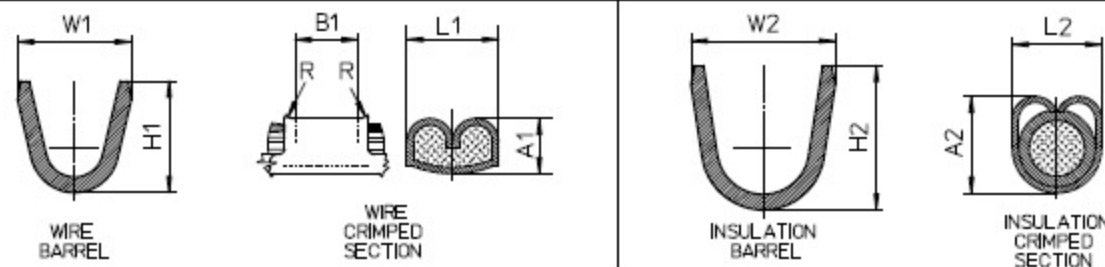

VALUES OBTAINED USING A 1.5t PRESS

MTA P/N	DRAW N.	MATERIAL	RATED CURRENT (A)	Wire sec. (sqmm)	CONDUCTOR					INSULATION				TEAR OUT FORCE (N)	M
					H1	W1	A1 ±0.05	L1	B1	H2	W2	A2			
1707920/10	B0-018.003A	CuSn + STEEL CLIP	14	0.5	3.5	3.2	1.35	2.60	3.20	4.8	5	-	3.65	>70	2.
				0.75			1.45	2.60	3.20			-	3.64	>90	
				1			1.55	2.60	3.20			-	3.64	>115	
				1.5			1.65	2.60	3.20			-	3.65	>155	
1707930/10	B0-018.003B	CuSn + STEEL CLIP	20	2	4	3.8	1.80	3.05	3.20	4.8	5.5	-	4.12	>195	2.
				2.5			1.90	3.06	3.20			-	4.14	>235	
				3			2.00	3.10	3.20			-	4.14	>360	
1707940/20	B0-018.003C	COPPER ALLOY+ STEEL CLIP	37	4	6.3	5.6	2.4	3.68	3.20	6.4	6.2	-	5.30	>320	5
				6			2.55	3.71	3.20			-	5.25	>400	

UNCONTROLLED COPY
in case of drawing updating/revision
NO AUTOMATIC
resubmission will follow

MTA		MTA P/N	1707920/10	Denom.	TERMINAL UNI F630 WITH CLIP
		Draw No.	B0-018.003A	Used for	SECTION CABLE 0.5-1.5 sqmm
		Draw for	CLIENT	Material	SEE TABLE
		Scale	Weight(g)	Un.Tol±	Ang.Tol±
		3 : 1	1.4	0.5	1
		Coating	TIN PLATED		
		Colour			
		Note			
		CAD Software	PTC Drafting		
REV 14		All proprietary rights reserved by MTA S.p.A. - This drawing shall not be reproduced, or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringement will be legally pursued.			