




RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	

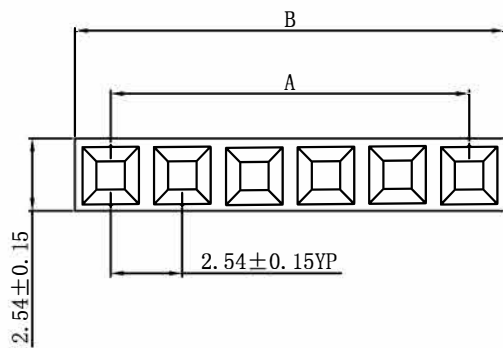

**SPECIFICATION**  
 Voltage rating: 250V AC, DC  
 Current Rating: 3.0A, AC, DC  
 Withstand voltage: 800V AC/minute  
 Contact resistance: 20mΩ max  
 Insulation resistance: 1000MΩ min  
 Temperature range: -25° C ~ +85° C

**HOUSING**  
 ● Material: PBT UL94V-0  
 ■ Color: Black

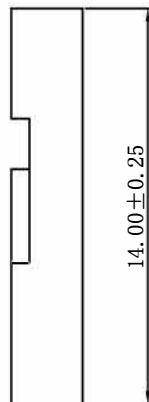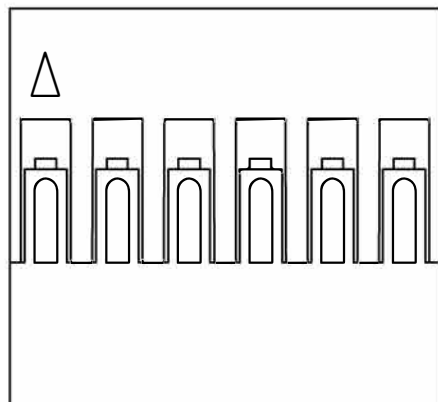

Poles	DIM. A	DIM. B	Poles	DIM. A	DIM. B
1	--	2.54	21	50.80	53.34
2	2.54	5.08	22	53.34	55.88
3	5.08	7.62	23	55.88	58.42
4	7.62	10.16	24	58.42	60.96
5	10.16	12.70	25	60.96	63.50
6	12.70	15.24	26	63.50	66.04
7	15.24	17.78	27	66.04	68.58
8	17.78	20.32	28	68.58	71.12
9	20.32	22.86	29	71.12	73.66
10	22.86	25.40	30	73.66	76.20
11	25.40	27.94	31	76.20	78.74
12	27.94	30.48	32	78.74	81.28
13	30.48	33.02	33	81.28	83.82
14	33.02	35.56	34	83.82	86.36
15	35.56	38.10	35	86.36	88.90
16	38.10	40.64	36	88.90	91.44
17	40.64	43.18	37	91.44	93.98
18	43.18	45.72	38	93.98	96.52
19	45.72	48.26	39	96.52	99.06
20	48.26	50.80	40	99.06	101.60

(PROJECT)		(TOLERANCE)	(DRAWN)	065-1108-01	(AG)
	mm	0 ±0.40		(PART NO)	1/1
	FIT	0.0 ±0.30	(CHECKED)		
	A	0.00 ±0.20	(APPROVE)	(NAME)	2.54 HSG
	2013 07 24	0.000 ±0.05			