
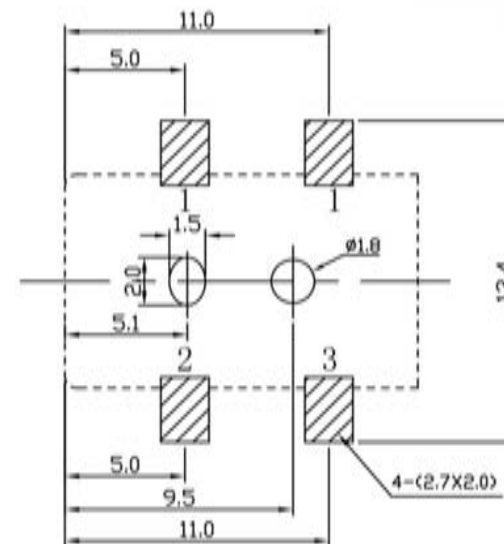
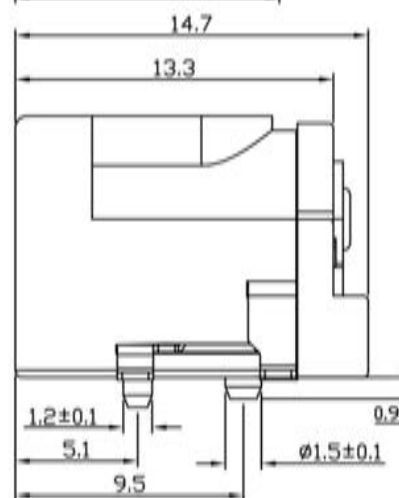
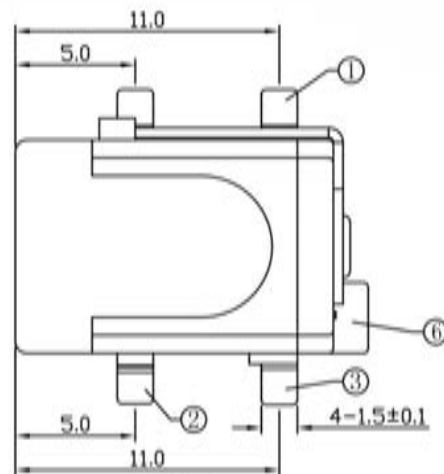
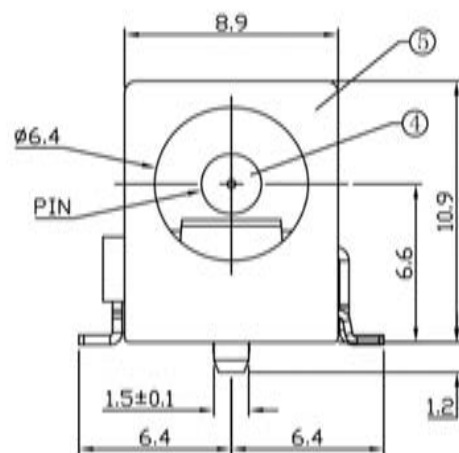


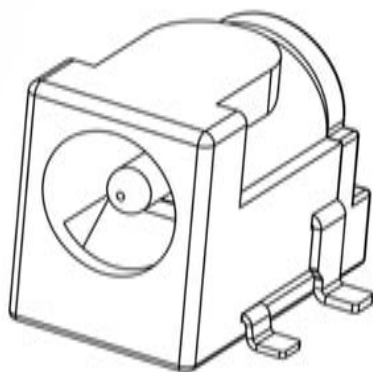

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

SCHEMATIC		
C8118-CCTB0000R	$\phi 2.0$	1
C8118-DCTB0000R	$\phi 2.5$	3
		2

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

6	COVER	1	PA9T	UL-94V0(BLACK)
5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	MB:Cu Cn/Sn PLATED
3	CURVE PIECE	1	C2680 t=0.40	MB:Cu Sn PLATED
2	SPRING	1	C5191 t=0.30	MB:Cu Sn PLATED
1	CURVE PIECE	1	C2680 t=0.40	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS
Compliant

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日

2010/01/07

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差

SIZE
紙張尺寸 A4

REV.
版本 B

PART NAME 品名

DC POWER JACK SMT TYPE $\phi 2.0$ mm or $\phi 2.5$ mm
NORMAL CLOSE TIN PLATING BLACK INSULATOR
REEL PACKING ROHS

PART NO.

料號