
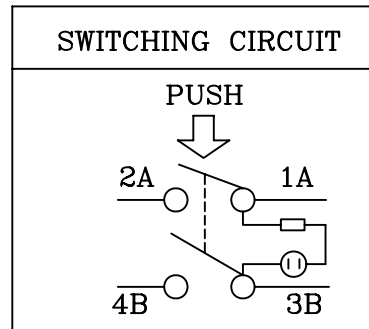


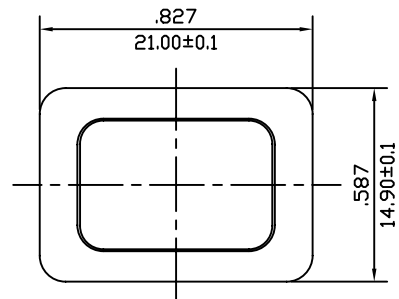

SWITCHING CIRCUIT

SPECIFICATION MODEL : "PS-5" SERIES

RATING: 16A 125VAC, (UL, CSA)

16A 250VAC, (UL, CSA)

16A(4) 250VAC ~ T125/55

(VDE, SEMKO, DEMKO, NEMKO, FIMKO, SEV)




CONTACT RESISTANCE: 20mΩ (MAX),

INSULATION RESISTANCE: 500VDC - 100MΩ (MIN).

WITHSTAND VOLTAGE: 1,000VAC 1 MINUTE.

ILLUMINATED: 200~250VAC

OPERATION: 500±200 GRAM.

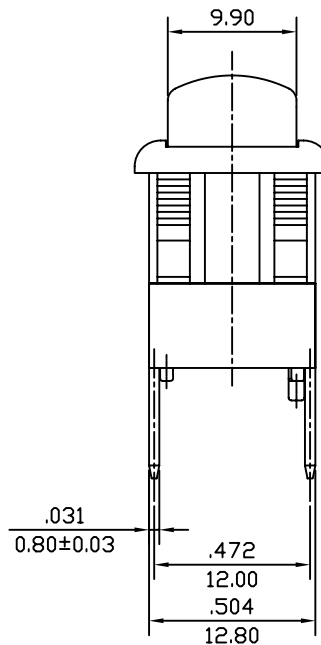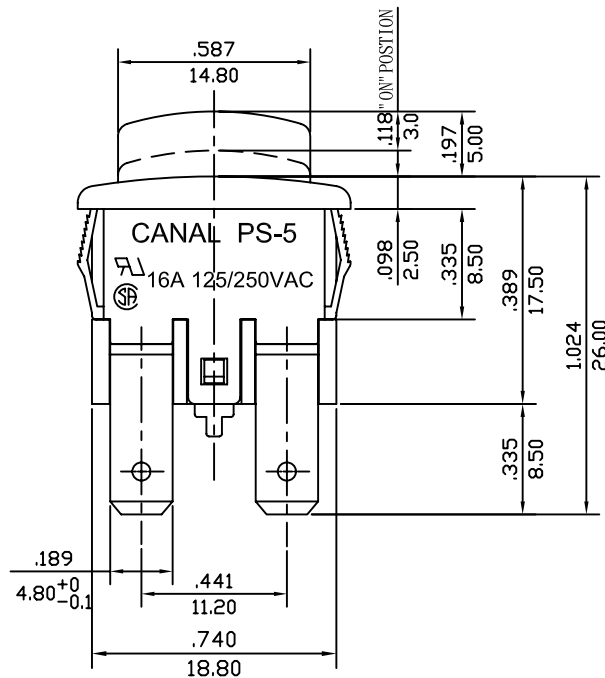

X=Panel thickness	Dim.Y	Dim.Z
0.75~1.25mm	19.2 $\pm$ _{0.1} mm	12.9 $\pm$ ₀ ^{0.15} mm
1.25~2mm	19.4 $\pm$ _{0.1} mm	12.9 $\pm$ ₀ ^{0.15} mm
2~3mm	19.8 $\pm$ _{0.1} mm	12.9 $\pm$ ₀ ^{0.15} mm

NOTE: 1. TOLERANCES UNLESS OTHERWISE SPECIFIED

2. IT IS IN COMPLIANCE WITH CANAL ROHS SPECIFICATION: WI-QA-24

REVISION	DESCRIPTION	REVISED BY	TOLEANCES	.X	.XX	ANGLE	1/2°	UNIT	mm	PART NAME	PS-5 SPEC DRAWING	DWG NO
△			DRAWN BY	劉義正	DESIGNED BY	劉義正	SCALE	5/3				
△			CHECKED BY		APPROVED BY		DATE	2007.03.08	PART NO	PS5-210-PG**-S		S1587A